






OA 100 Series Overall Dimention
And Performance Parameter

The Standard Type



Parameters of The direct Type	
Square	□9x9, □11x11, □14x14
Flange	F05, F07
Stem	Height≤19mm

The direct Type

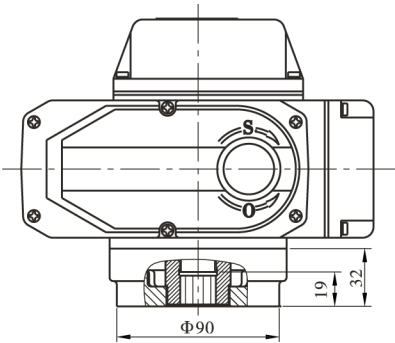

Type Power Parameters Performance	OA 100				
	DC24V	AC24V	AC110V	AC380V	AC220V
Motor Power	25W	25W	25W	15W	25W
Rated Current	2.03A	2.12A	0.57A	0.10A	0.35A
Standard Time/Torque	30S/100Nm				
Optional Time/Torque	15S/50Nm			15S/50Nm 60S/50Nm	
Turning Angle	0~90° 、0~360° at any angle				
Available Control Circuit	Type A/B/C/D/E/F/G/H				
Total Weight	3.0kg				
Insulating Resistance	DC24V/AC24V:100MΩ/250VDC AC110V/AC220V/AC380V:100MΩ/500VDC				
Withstand Voltage Class	DC24V/AC24V:500VAC 1minte、AC110V/AC220V:1500VAC 1minte、AC380V:1800VAC 1minte、				
Protection Class	IP 67				
Installation Angle	360° at any angle				
Electric Interface	G1/2 waterproof cable connector: the power cord, signal lines each one				
Ambient Temperature	-30℃ ~ +60℃				
Supply function	Dehumidi fication Wet Heater				