


Check Valve (Screwed) H14W-(16-64)C,P,R

- Nominal pressure:PN1.6,2.5,4.0,6.4MPa
- Strength testing pressure:PT2.4 , 3.8 , 6.0 , 9.6MPa
- Seat tesing pressure(high pressure) : 1.8,2.8,4.4,7.1Mpa
- Applicable medium: (16-64)C Water. Oil. Gas
(16-64)P Nitric acid
(16-64)R Acetic acid
- Applicable temperature: -40~180° C

(WCB, CF8, CF8M)



Swing Check Valve
H14W-(16-64)C,P,R

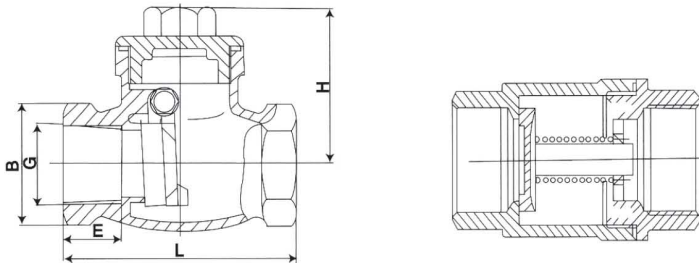

2PC Spring Check Valve
H11-(16-64)C,P,R

Materials of main parts

Description Of Parts	(16-64)C	(16-64)P	(16-64)R
Body	WCB	CF8	CF8M
Bonnet	WCB	CF8	CF8M
Valve flap	CF8	CF8	CF8M
Sealing		304.316.PTFE	
Gasket	Polytetrafluorethylene(PTFE)		

Main outer size

DN	G	L	E	B	N
8	1/4"	64	10	24	42
10	3/8"	64	10	24	42
15	1/2"	64	12	26	45
20	3/4"	80	17	32	53
25	1"	90	20	42	60
32	1 1/4"	105	20	52	64
40	1 1/2"	120	20	58	76
50	2"	140	23	69	82
65	2 1/2"	165	27	86	89