



Female threaded and socket welded globe valves

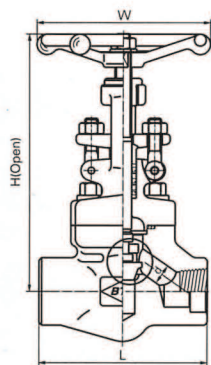


CL800 Bolted bonnet, full port & reducing port outside screw and yoke(OS & Y)
Threaded, butt-welded or socket welded ends; design to BS 5352.

Specification (NPS)	R.P	-	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3
	F.P	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2
Face to face	L	79	79	92	111	120	152	172	200	
Handwheel diameter	W	100	100	100	125	160	160	180	200	
Height	H	164	164	164	203	224	260	300	355	
Height (angle dimension)	d	7	9	13	17.5	23	30	35	46	
Weight(Kg)		1.9	2.28	2.37	4.3	5.75	7.8	12.5	17.5	

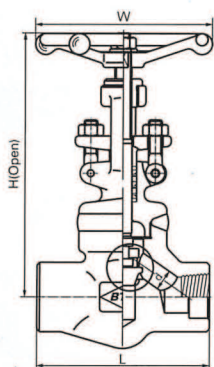


CL800 Welded bonnet, full port & reducing port outside screw and yoke(OS & Y)
Threaded, butt-welded or socket welded ends; design to BS5352

Specification (NPS)	R.P	-	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3
	F.P	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2
Face to face	L	79	79	92	111	120	152	172	200	
Handwheel diameter	W	100	100	100	125	160	160	180	200	
Height	H	164	164	164	203	224	260	300	355	
Height (angle dimension)	d	7	9	13	17.5	23	30	35	46	
Weight(Kg)		1.7	1.7	1.9	3.3	5.2	6.8	10.6	13.8	

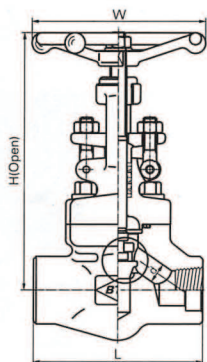

CL900-CL1500 Bolted bonnet, full port&reducing port outside screw and yoke(OS&Y)
Threaded, butt-welded or socket welded ends; design to BS 5352

Specification (NPS)	R.P	-	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3
	F.P	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2
Face to face	L	92	111	111	120	152	172	200	220	-
Handwheel diameter	W	100	125	125	160	160	180	200	240	-
Height	H	171	207	207	240	258	330	355	370	-
Height (angle dimension)	d	7	12	15	20	28	32	40	45	-
Weight(Kg)		2.3	3.7	3.6	6.8	7.6	11.6	15	21.9	-

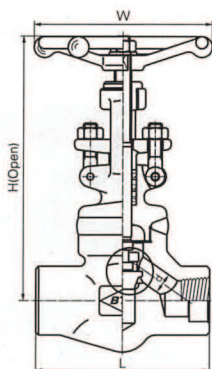

CL900-CL1500 Welded bonnet, full port&reducing port outside screw and yoke(OS&Y)
Threaded, butt-welded or socket welded ends; design to BS5352

Specification (NPS)	R.P	-	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3
	F.P	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2
Face to face	L	92	111	111	120	152	172	200	220	-
Handwheel diameter	W	100	125	125	160	160	180	200	240	-
Height	H	171	207	207	240	258	330	355	370	-
Height (angle dimension)	d		12	15	20	28	32	40	45	-
Weight(Kg)		270	3.4	3.3	6.0	5.6	10.3	14.2	18.0	-